


Accessories (optional):

- ◆ Wire decoilers with and or without motorization for any geometry
- ◆ Switch off ramp with supervision of decoiler
- ◆ Wire deflector and wire guiding stands
- ◆ Machine tools

- ◆ Safety fence package rear side
- ◆ Electrical wire cutter
- ◆ Ethernet connection
- ◆ Cage removal carriage (standard and electro hydraulic)

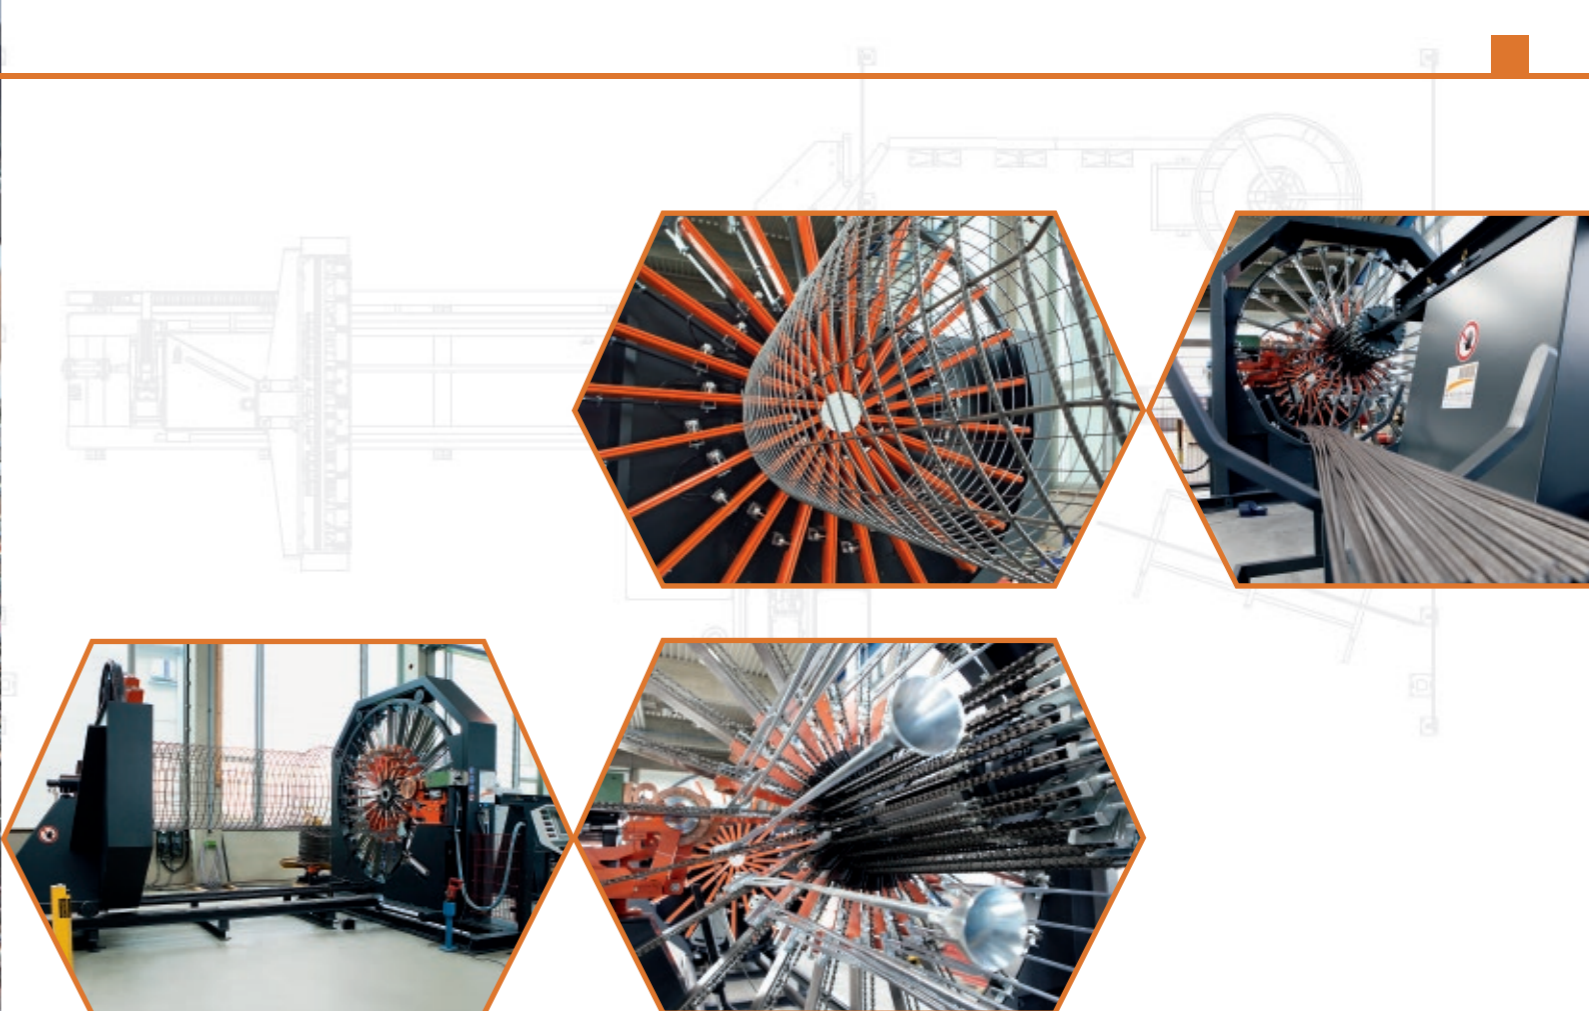


Dimension	190	250	300
Type*	M/R	M/R	M/R
Diameter cage (mm)	220-1900	330-2500	330-3000
Diameter extension (opt.)	220-2025	280-2630	280-3100
Nr. LD**	12/18/24	12/18/24	24/36
max. RPM	19	15	13
Cage length max.	5000 mm	5000 mm	5000 mm
Spacing WD** mm	20-200 mm	20-200 mm	20-200 mm
LD Ø mm	5-10/12 mm	5-10/12 mm	5-10/12 mm
WD Ø mm	5-12 mm	5-12 mm	5-12 mm
Welding capacity	80 KVA	80/100 KVA	80/100 KVA

* Type key: M = Manhole (round without bell) / R = Round with bell
 ** LD= Longitudinal, WD= Wrap wire
 Fat Standard

Characteristics:

- ◆ Extreme reliability and long life span due to stable construction
- ◆ High flexibility
- ◆ Dimensional change over by the push of a button and link programs for inner and outer cages
- ◆ Strictest production tolerances for exact and straight cages. Compatibility with any standard
- ◆ Very low maintenance and energy costs
- ◆ Very user friendly by the use of Touch Panel and IPC/PLC-control
- ◆ Is in conformity with the most update safety standards / CE
- ◆ No foundation required
- ◆ Only one operator required
- ◆ Back up of all production data and settings

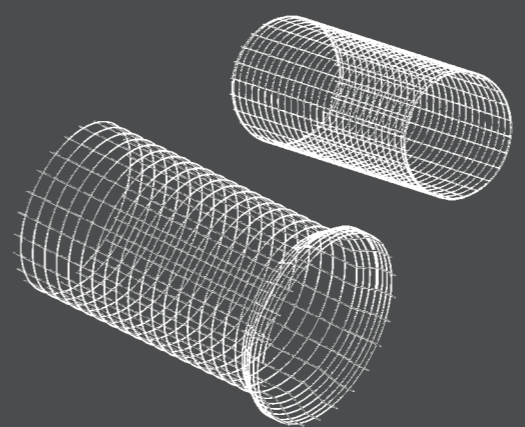

ESM

Wire cage machine

For the production of wire cages for the manhole and concrete pipe industry